



Outline Drawing

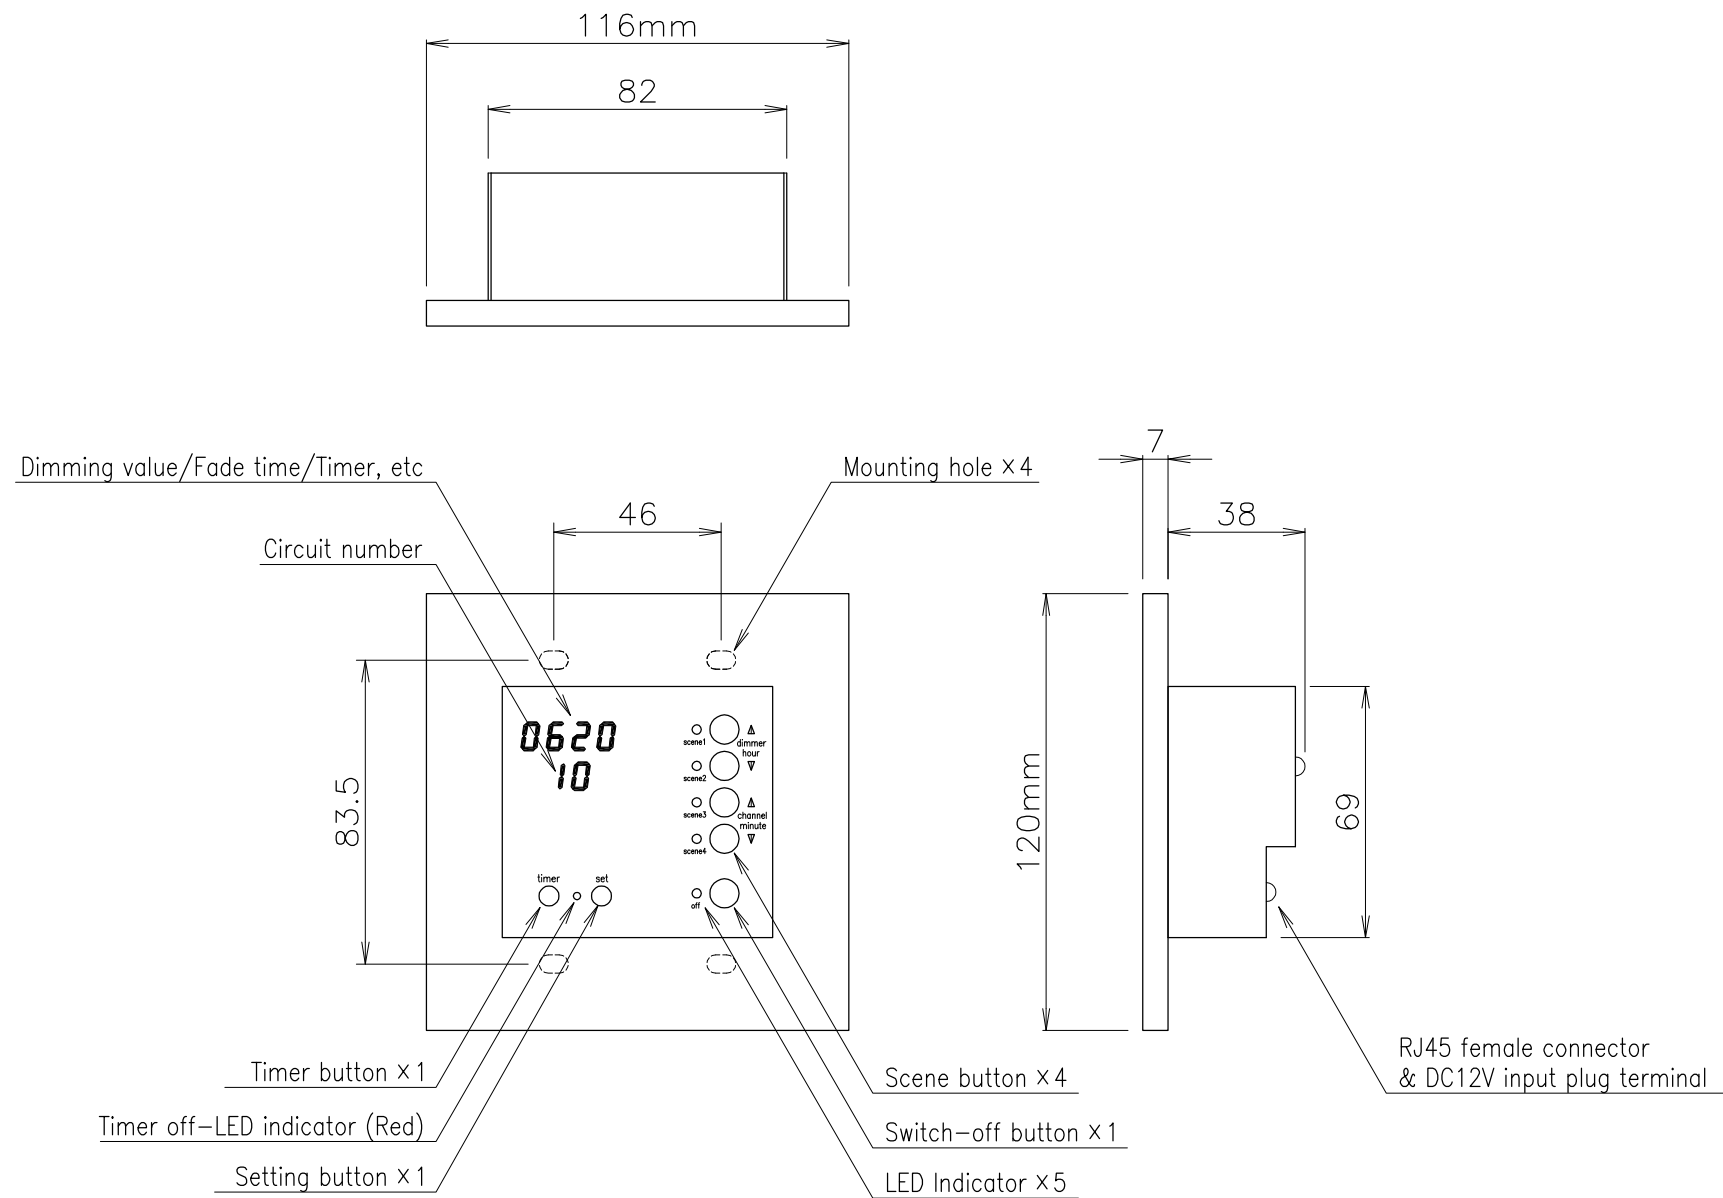

NOTE: Required 70mm deep minimum.

Back View

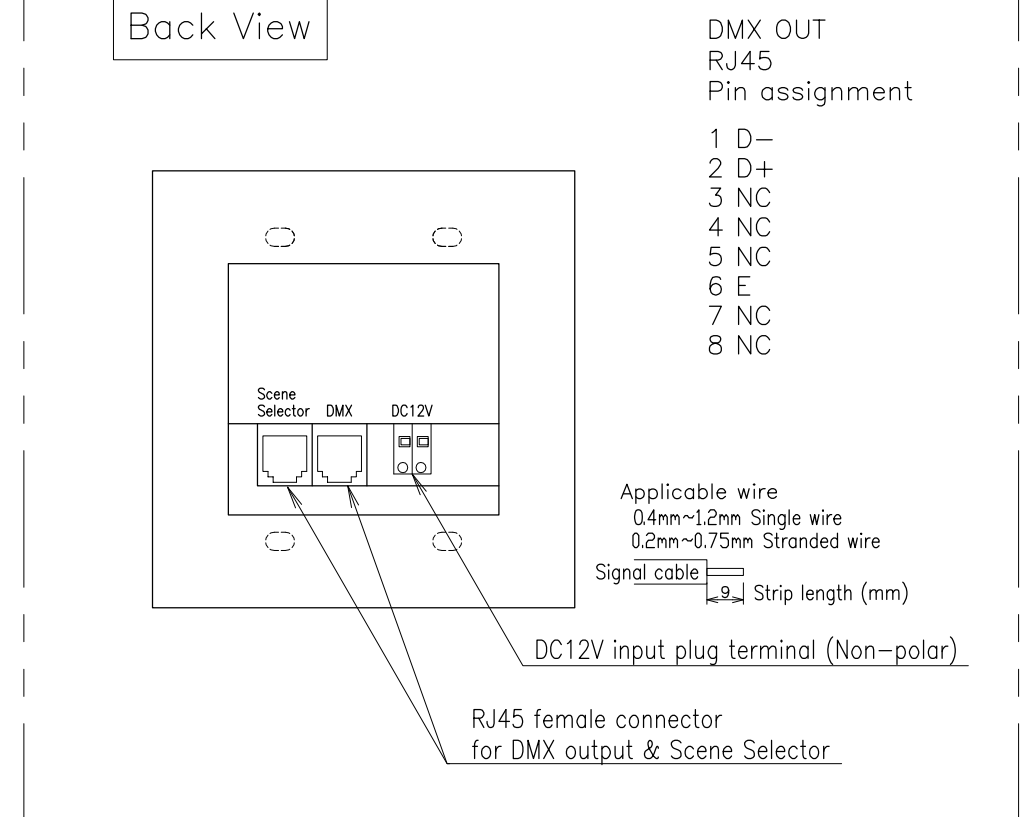

Specification

- Input voltage DC12V
- Mounting Wall mounted (fits in a 2-gang switch box: not supplied.)
- Finish Panel: Resin white Plate: White
- Output signal DMX512 RJ45 terminal, LAN
- Circuits 40 circuits
- Dimming range 0 ~ 100%
- Stored scenes 4 scenes + OFF
- Fade time 0 ~ 99 minutes 59 seconds
- Timer settings 4 scenes + OFF (individual setting)
- Timer 24 hour timer with power failure compensation (NOTE: The timer has a margin of error of ±15s per month.)
- Key Lock Setting & Scene button are locked during timer operation (unlockable).

備考	6				部番	部品名	材質	数量	仕上		
	7				1						
	8				2				Light Scene Controller 40		
訂正	9				3				Part No. SC2050		
	10				4						
	11				5						
NO.		重量	Kg	縮尺	1/2	日付	17-06-06 21-09-16 17-09-26 22-11-25	製図	s.matsuyama	検図	e.motoki

Style-tec
株式会社スタイルテック